

**H31RPC**

Zylinder rund  
Cylinder round  
Cylindre rond

60.000 - 160.000  
5



Shank	L mm	4,2	4,2
Size	<b>ISO</b>	<b>Order No.</b>	
Ø <sub>10</sub> mm		US No.	1557PC 1558PC
<b>FG</b>	500 314 137 008...	<b>H31RPC.314...</b>	010 012

**H31R**

Zylinder rund  
Cylinder round  
Cylindre rond

max. 300.000  
5



Shank	L mm	4,2	4,2
Size	<b>ISO</b>	<b>Ord No.</b>	
Ø <sub>10</sub> mm		US No.	1557 1558
<b>FG</b>	500 314 137 007...	<b>H31R.314...</b>	010 012



**C36RS**

Zylinder rund  
Cylinder round  
Cylindre rond

max. 300.000  
6



Shank	L mm	4,2	
Size	<b>ISO</b>	<b>Order No.</b>	
Ø <sub>10</sub> mm			
<b>FG</b>	500 314 137 293...	<b>C36RS.314...</b>	012

**C4AKL**

Kronentrenner  
Crown Separator  
Coupe-couronne  
lang • long • long

120.000 - 160.000  
6



Shank	L mm	3,5	
Size	<b>ISO</b>	<b>Order No.</b>	
Ø <sub>10</sub> mm			
<b>FGL</b>	•• 500 315 139 019...	<b>C4AKL.315...</b>	012




**C34L**

Kronentrenner  
Crown Separator  
Coupe-couronne  
lang • long • long

max. 160.000  
6



Shank	L mm	3,5	3,5
Size	<b>ISO</b>	<b>Order No.</b>	
Ø <sub>10</sub> mm			
<b>FGL</b>	•• 500 315 139 293...	<b>C34L.315...</b>	010 012

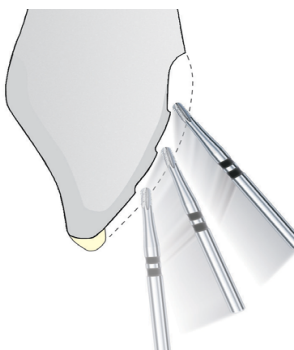

**Instructiuni de utilizare:**

1. Smaltul trebuie indepartat cu o freza diamantata.
2. Unghiul de taiere recomandat este de 45 de grade.
3. Reducerea stratului de material din coroana incepand de sus in jos la o turatie de maxim 160.000 rpm.